



Standard Data - B (SDB)

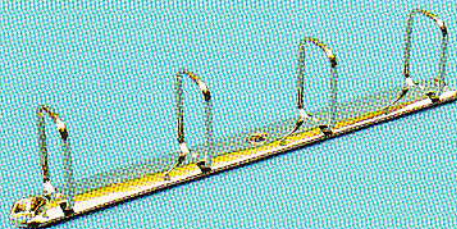

Bügelmechanik Schienenausführung Aufreiböffnung Rückenleiste RLS auf Wunsch	Arch mechanism Blade type Pull-open metal Backplate RLS on request	Mécanisme à étriers Mécanisme à plaques Ouverture manuelle Contre-plaque RLS sur demande	Mecanismo de anillas rectangulares Mecanismo de regleta Abertura manual Contraplaca RLS sobre pedido
--	---	---	---

A Mechaniklänge B Bügelanzahl C Kapazität D Gehäusebreite	A Metal length B Number of arches C Capacity D Width of base	A Longueur du mécanisme B Nombre d'étriers C Capacité D Largeur de semelle	A Longitud del mecanismo B Número de anillas C Capacidad D Ancho de la base
--	---	---	--

A / B / C (D)	ABC									kg /1000	m ³ /Karton	TM
SDB 138/02/20 (21) * 0	D	89	20	22	30	127,0	3,4 x 2,2	250	16.500	25,0	0,0197	KH
SDB 138/02/35 (21) *	D	89	35	26	43	127,0	3,4 x 2,2	210	10.080	36,0	0,0263	KH
SDB 138/02/52 (21) * 0	D	89	52	26	61	127,0	3,4 x 2,2	210	9.240	41,0	0,0263	KH

SDB 290/04/25 (21) * 0	D	76,2-88,9-76,2	25	25	35	281,5	3,4 x 2,2	210	7.350	78,0	0,0370	KH
SDB 290/04/35 (21) * 0	C	76,2-88,9-76,2	35	26	43	281,5	3,4 x 2,2	200	6.000	81,0	0,0432	KH
SDB 290/04/52 (21) * 0	D	76,2-88,9-76,2	52	26	61	281,5	3,4 x 2,2	125	3.750	90,0	0,0428	KH